

3.2.5. SPECIFIKĀCIJA GAISMEKLIM MINI LUMA 67W LED 40

Mini Luma 40 LED (2 744 kWh)


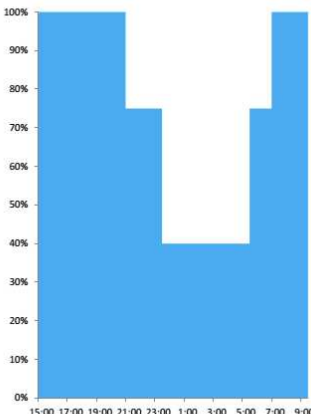
Projectname:

Requested parameters

Colour temperature	Neutral White (LCW-CQAR-PC-40MU)
Flux	7 600 lm @ ConstaFlux
Requested lumen depreciation	ConstaFlux
Requested expected lifetime	60 000 hours
Dim option	DYNADIM
Dim regime or percentage	29

Result 2 744 kWh

Luminaire type	Mini Luma
Basic insulation class	Class II
Number of LED	40 LED
System power (minimum)	66 W
System power (maximum)	70 W
Consumed power over lifetime	2 744 kWh
Minimal realized flux	7 600 lm
Power Factor (100%)	0.98
Lighting Regulation	NONE
Driver Code	K00
Program Code	FAKB9N2IQI39

Pieprasītie parametri		Resultāts 2'695 kWh																			
Krāsu T	Neitrāli balts 4000K	Gaismekļa tips	Mini Luma																		
Gaismas plūsma	7'600 lum konstantā plūsma	Drošības klase	Otrā II																		
Gaismas plūsmas nolietojums	Konstanta plūsma	LED skaits	40 LED																		
Kalpošanas laiks	60'000 stundas	Sistēmas jauda (minimums)	66W																		
Gaismas regulēšana	DynaDim	Sistēmas jauda (maksimums)	70W																		
Gaismas regulēšana (nodimmējums)	60%	Kalpošanas laikā patērējamā elektroenerģija	2'744 kWh																		
Minimālais gaismas nodimmējums	25%	Minimālā gaismas plūsma	7'600 Lum																		
<div>Dimregime 29</div> <div>Regime 29</div> <div></div> <div><table><tr><th>from</th><th>to</th><th>% light</th></tr><tr><td>---</td><td>21:00</td><td>100%</td></tr><tr><td>21:00</td><td>23:30</td><td>75%</td></tr><tr><td>23:30</td><td>5:30</td><td>40%</td></tr><tr><td>5:30</td><td>7:00</td><td>75%</td></tr><tr><td>7:00</td><td>---</td><td>100%</td></tr></table></div>		from	to	% light	---	21:00	100%	21:00	23:30	75%	23:30	5:30	40%	5:30	7:00	75%	7:00	---	100%	Lietderības faktors	0.98
		from	to	% light																	
		---	21:00	100%																	
		21:00	23:30	75%																	
		23:30	5:30	40%																	
5:30	7:00	75%																			
7:00	---	100%																			
Gaismas regulācija	NONE																				
Vadības bloka kods	I00																				
Programmas kods	FAKB9N2IQI39																				