

CoreLine Highbay

BY121P G2 LED205S/840 PSU WB GR



LED Module, system flux 20,500 lm - Power supply unit - Wide beam

Following the successful introduction of the CoreLine High-bay in 2013, the upgrade to a new generation of LEDs has further improved color rendering and total cost of ownership. Designed as a replacement for HPI 250/400 W luminaires, CoreLine High-bay offers customers all the benefits of LED lighting – fresh light quality, longer service lifetime, reduced energy consumption and maintenance – from a trusted manufacturer. At the same time, it delivers clear benefits for the installer too. The luminaire can be installed on the existing grid. Electrical connection is straightforward: there is no need to open the luminaire for installation or servicing. And being smaller and lighter than conventional luminaires, it is very easy to handle.

Product data

• General information

Product family code	BY121P [BY121P]
Product family code extension	G2 [Generation 2]
Number of light sources	1 [1 pc]
Lamp family code	LED205S [LED Module, system flux 20,500 lm]
Light source color	840 [840 neutral white]
Light source replaceable	false [No]
Driver/power unit/transformer	PSU [Power supply unit]
Driver included	true [Yes]
Optic type	WB [Wide beam]
Optical cover/lens type	FG [Flat glass]
Dimmable	No [No]
Connection	PI [Push-in connector 3-pole]
Cable	C250PI [Cord 0.25 m with push-in connector]
Protection class IEC	CLI [Safety class I]
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Color	GR [Gray]
Standard RAL color	RAL7035 [Light gray]
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
CE mark	CE [CE mark]

• Electrical

Input voltage	220-240 V [220 to 240 V]
---------------	--------------------------

Input frequency	50-60 Hz [50 to 60 Hz]
-----------------	------------------------

• Mechanical

Housing material	ALU [Aluminum]
Optic material	PMMA [Polymethyl methacrylate]
Optical cover/lens material	GTL [Laminated tempered glass]

• Initial perform. (IEC compliant)

Initial input power	198 W [198 W]
Initial luminous flux	20500 Lm
Initial LED luminaire efficacy	105 Lm/W
Init. Corr. Color Temperature	4000 [4000 K]
Initial chromaticity	(0.38, 0.38) SDCM <5

• Over time perform. (IEC compliant)

Median useful life L90B50	25000 hr
Median useful life L80B50	50000 hr
Driver failure rate at 5000 h	1 %

• Application conditions

Average ambient temperature	T25 [+25 °C]
Ambient temperature range	-30 to +40°C [-30 to +40 °C]
Maximum dim level	- [Not applicable]
Suitable for random switching	No [No]



PHILIPS


• Product Data

Order code 911401578311
Full product code 911401578311
Full product name BY121P G2 LED205S/840 PSU WB GR
Order product name BY121P G2 LED205S/840 PSU WB GR
Pieces per pack 1
Packs per outerbox 1

Bar code on pack - EAN1 8710163296067
Bar code on outerbox - EAN3 8710163296067
Logistic code(s) - 12NC 911401578311
Net weight per piece 9.500 kg



Dimensional drawing

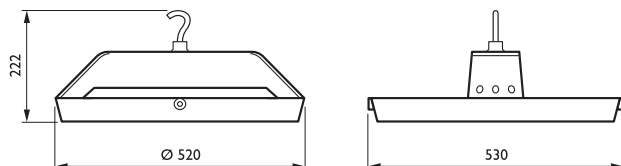

BY121P G2 LED205S/840 PSU WB GR



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, November 22
data subject to change